

## DVR-216G-K1 TURBO HD DVR

### Key Feature

- Support H.265 Pro+/H.265 Pro/H.265 video compression
- Support HDTV/AVHD/CVI/CVBS/IP video input
- Up to 18-ch IP camera input (up to 5 MP)
- Max. 800 m for 1080p and 1200 m for 720p HDTV signal transmission
- Up to 10 TB capacity per HDD



### Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency and reduces data storage costs
- Full channel recording at up to 1080p lite resolution

### Storage and Playback

- Smart search for efficient playback

### Smart Function

- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Support 1-ch line crossing detection and intrusion detection

### Network & Ethernet Access


- HiLookVision & DDNS (Dynamic Domain Name System) for easy network management
- Configurable output bandwidth limit

## Specification

<b>Model</b>	<b>DVR-216G-K1</b>
<b>Recording</b>	
<b>Video compression</b>	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
<b>Encoding resolution</b>	1080p lite/720p/VGA/WD1/4CIF/CIF
<b>Frame rate</b>	Main stream: For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA@15fps; CIF@25fps (P)/30fps (N) For 720p stream access: 720p/WD1/4CIF/VGA@15fps; CIF@25fps (P)/30fps (N) For standard definition stream access: WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
	Sub-stream: For 1080p and 720p stream access: CIF/QVGA@15fps For standard definition stream access: CIF/QVGA@25fps (P)/30fps (N)
<b>Video bit rate</b>	32 Kbps to 4 Mbps
<b>Dual stream</b>	Support
<b>Stream type</b>	Video, Video & Audio
<b>Audio compression</b>	G.711u
<b>Audio bit rate</b>	64 Kbps
<b>Video and Audio</b>	
<b>IP video input</b>	2-ch (up to 18-ch)
	Up to 5 MP resolution
	Support H.265+/H.265/H.264+/H.264 IP cameras
<b>Analog video input</b>	16-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
<b>HDTVI input</b>	1080p25, 1080p30, 720p25, 720p30
<b>AHD input</b>	1080p25, 1080p30, 720p25, 720p30
<b>HDCVI input</b>	1080p25, 1080p30, 720p25, 720p30
<b>CVBS input</b>	PAL/NTSC

<b>HDMI/VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>Audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)
<b>Audio output</b>	1-ch, RCA (Linear, 1 KΩ)
<b>Two-way audio</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)
<b>Synchronous playback</b>	16-ch
<b>Network</b>	
<b>Remote connections</b>	128
<b>Network protocols</b>	TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
<b>Network interface</b>	1, RJ45 10M/100M self-adaptive Ethernet interface
<b>Auxiliary interface</b>	
<b>SATA</b>	1, SATA interface
<b>Capacity</b>	Up to 10 TB capacity for each disk
<b>USB interface</b>	2 × USB 2.0
<b>General</b>	
<b>Power supply</b>	12 VDC
<b>Consumption (without HDD)</b>	≤ 10 W
<b>Working temperature</b>	-10 °C to 55 °C (14 °F to 131 °F)
<b>Working humidity</b>	10% to 90%
<b>Dimension (W × D × H)</b>	260 × 222 × 45 mm (10.2 × 8.7 × 1.8 inch)
<b>Weight (without HDD)</b>	≤ 1.1 kg (2.4 lb)

## Physical Interface

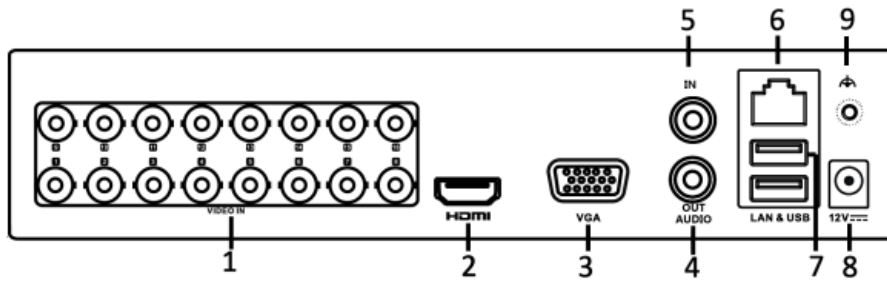

No.	Description	No.	Description
1	VIDEO IN	6	LAN Network Interface
2	HDMI Interface	7	USB Interface
3	VGA Interface	8	12 VDC Power Input
4	AUDIO OUT	9	GND
5	AUDIO IN		

## Available Model

DVR-216G-K1